




GLOBAL EAST ASIA TECHNOLOGY CO.,LIMITED

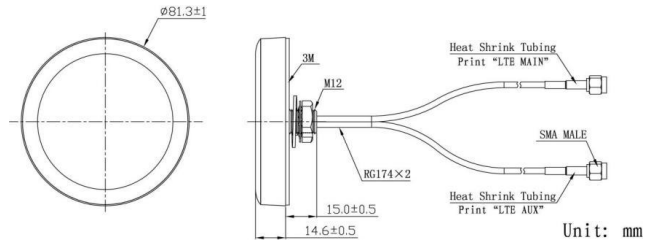

GL-DY046LM Dual 4G Antenna

Item	Specifications	
LTE Antenna MAIN	Frequency Range	698~960MHz/1710~2690MHz
	V.S.W.R	<3.0
	Polarization	Linear
	Gain	2.5dBi (Zenith)
	Impedance	50 Ω
WIFI Antenna AUX	Frequency Range	2400~2500MHz
	V.S.W.R	<3.0
	Polarization	Linear
	Gain	2.0dBi (Zenith)
	Impedance	50 Ω
Mechanical	Cable	RG174
	Connector	SMA or others
	Material	ABS+PC
	Mounting Method	Screw
Environmental	Operating Temperature	-40 $^{\circ}$ C~+85 $^{\circ}$ C
	Relative Humidity	Up to 95%
	Ingress Protection	IP67(exclude cable outlet)
	Vibration	10 to 55Hz with 1.5mm amplitude 2hours

Add: Room 826, Floor 8,BLDG 13, University Science Park(East), Zhengzhou City,P.R.Henan,China.Zip Code: 450000

Tel: 86-371-60911368 **Email:** info@global-antenna.com **Web:** <https://www.global-antenna.com>