

GLOBAL EAST ASIA TECHNOLOGY CO.,LTD

GL-DY128

1 Electrical specifications


Frequency range (MHz)	2400~2500/4900~5900
Gain (dBi)	3
Polarization	Vertical
Impedance (Ω)	50
Max Power (W)	50
VSWR	≤ 2.0

2 Mechanical specifications


Connector	IPEX
Dimensions(mm)	42x12
Cable	RG1.13,100mm
Temperature ($^{\circ}\text{C}$)	-30~60
Humidity (%)	5~95

GLOBAL EAST ASIA TECHNOLOGY CO.,LTD

Testing

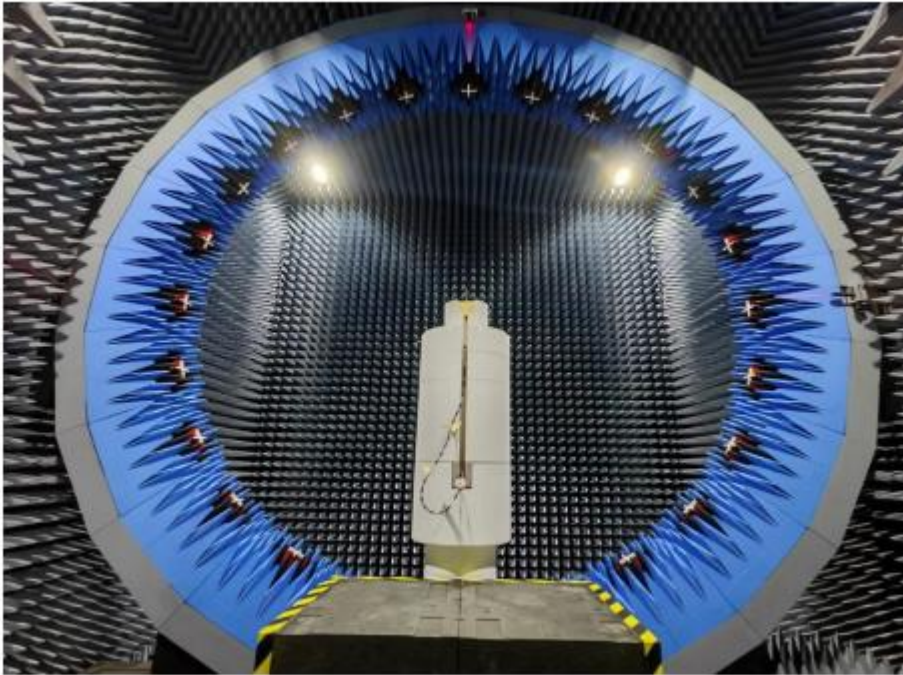

» VSWR

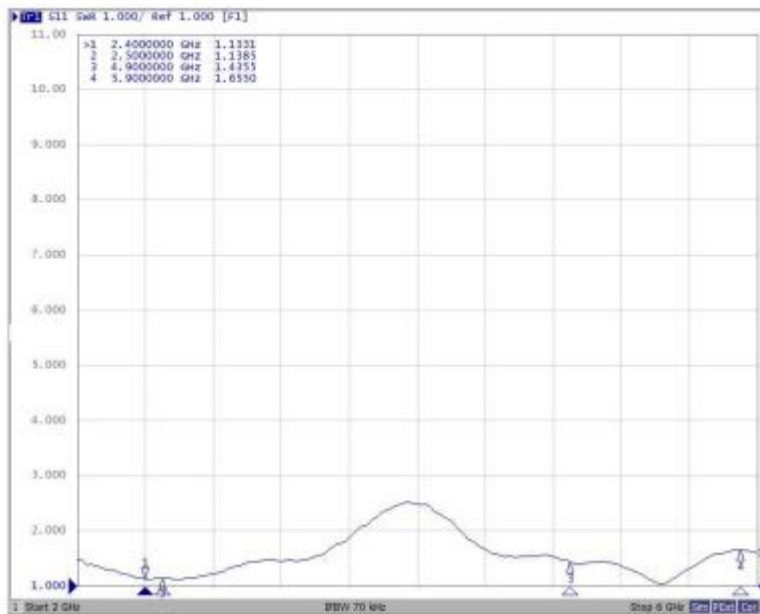

GLOBAL EAST ASIA TECHNOLOGY CO.,LTD

Drawing

7-WF-T-016 | 2024.03.06 | 初始发行

